
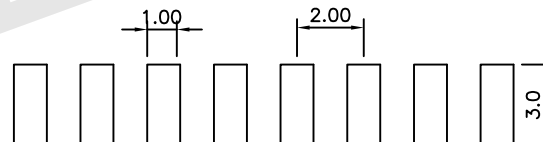


FH200-1XX-XXX

Female Header
 Pitch 2.00mm
 Single Row

Type1/Type2

 No.of Pins
 Single Row:2~40



PRODUCT SPECIFICATION

- INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- TERMINAL MATERIAL : COPPER ALLOY .
- FINISH : GOLD OR TIN PLATED.
- CURRENT RATING : 2 AMPERE.
- INSULATION RESISTANCE : 1000M OHMS MIN.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
- CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
 测试后 Final : 40 m Ohm Max. .
- OPERATING TEMPERATURE : - 40°C to +105°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08012016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD		
		CHEK 08Jan2016			
<p>THIRD ANGLE PROJECTION</p>	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°	APVD Abel 08Jan2016	NAME Female Header 2.00mm*6.35mm Single Row SMT Type		
		PRODUCT SPEC -	SIZE A4	DRAWING No. YL-ED-XXX	
		WEIGHT -	CUSTOMER DRAWING		
		SCALE 1 : 1	SHEET 1 OF 1		