
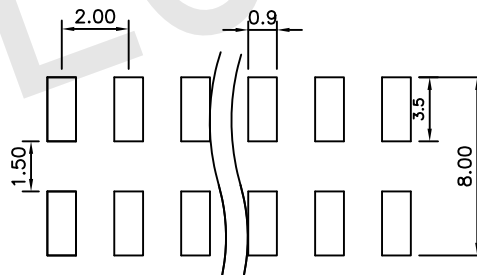


FH200-2XX-XXX

Female Header
Pitch 2.00mm
Dual Row

Type1/Type2
.....
No.of Pins
Dual Row:2~40

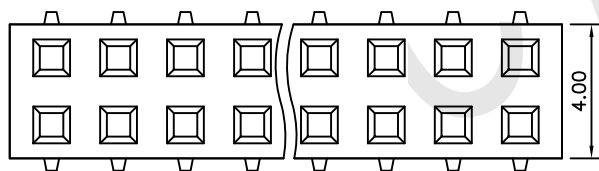

PRODUCT SPECIFICATION

- 1.INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 2.TERMINAL MATERIAL : COPPER ALLOY .
- 3.FINISH : GOLD OR TIN PLATED.
- 4.CURRENT RATING : 2 AMPERE.
5. NSULATION RESISTANCE : 1000M OHMS MIN.
6. DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max. .
8. OPERATING TEMPERATURE : - 40°C to +105°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD		
		CHEK 08Jan2016			
 THIRD ANGLE PROJECTION		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME Female Header 2.00mm*6.35mm Dual Row SMT Type	
		0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± -		DRAWING No. YL-ED-XXX	
		ANGLES ± 3°		SIZE A4	SCALE 1 : 1
				WEIGHT -	SHEET 1 OF 1
		CUSTOMER DRAWING			