
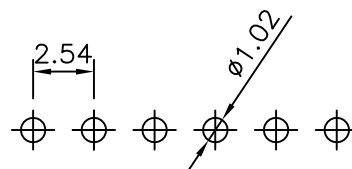
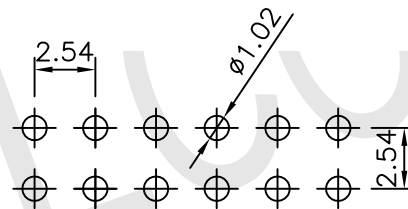


FH254-XXX-XXX

Female Header | Type1/Type2
 Pitch 2.54mm |
 2: Dual Row | No. of Pins
 1: Single Row | Single Row: 2-40P
 Dual Row: 2-40P

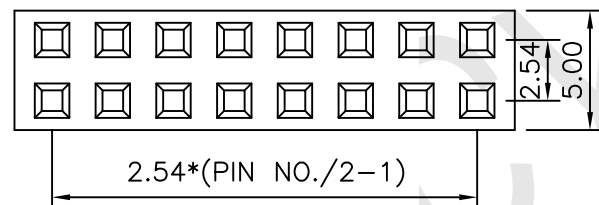

PRODUCT SPECIFICATION

1. INSULATOR MATERIAL : POLYESTER, UL94V-0 .
2. TERMINAL MATERIAL : COPPER ALLOY .
3. FINISH : GOLD OR TIN PLATED.
4. CURRENT RATING : 2 AMPERE.
5. INSULATION RESISTANCE : 1000M OHMS MIN.
6. DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
 测试后 Final : 40 m Ohm Max. .
8. OPERATING TEMPERATURE : - 40°C to +105°C.

DIM A	DIM B
3.50	3.00
5.00	3.00
7.10	3.20
8.50	3.20

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 080102016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		CHEK 08Jan2016		
		THIRD ANGLE PROJECTION		APVD Abel 08Jan2016
CUSTOMER DRAWING				WEIGHT -