




FH200-XXX-XXX


Female Header
Pitch 2.00mm
2: Dual Row
1: Single Row

Type1/Type2
.....
No. of Pins
Dual Row: 2~40
Single Row: 2~40

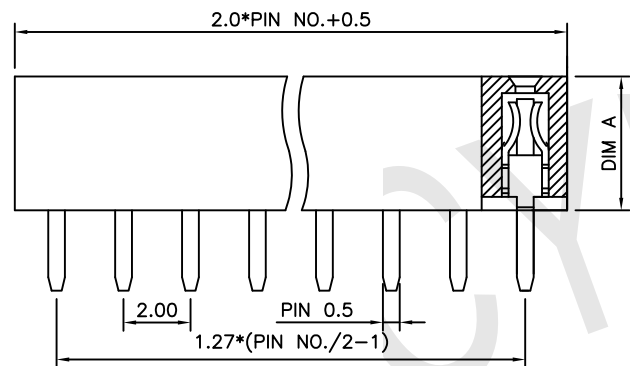

- PRODUCT SPECIFICATION
1. INSULATOR MATERIAL : POLYESTER, UL94V-0 .
 2. TERMINAL MATERIAL : COPPER ALLOY .
 3. FINISH : GOLD OR TIN PLATED.
 4. CURRENT RATING : 2 AMPERE.
 5. INSULATION RESISTANCE : 1000M OHMS MIN.
 6. DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
 7. CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max. .
 8. OPERATING TEMPERATURE : - 40°C to +105°C.

DIM A	DIM B	DIM C
2.00	2.50	4.00
4.00		
4.30	2.40/2.80	4.00/4.50
4.60		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 0801092016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD		
		CHEK 08Jan2016			
 THIRD ANGLE PROJECTION	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°	APVD Abel 08Jan2016	NAME Female Header 2.00mm DIP Type		
		PRODUCT SPEC	SIZE A4	DRAWING No. YL-ED-XXX	
		WEIGHT	CUSTOMER DRAWING		
			SCALE 1 : 1	SHEET 1 of 1	