
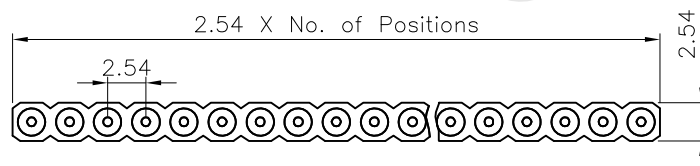


YL014-XXX-XXX

Machine Pin

014: Dual Row
015: Single Row

Single Row	Dual Row
002:02Pin	004:04Pin
003:03Pin	006:06Pin
*****	*****
040:40Pin	080:80Pin

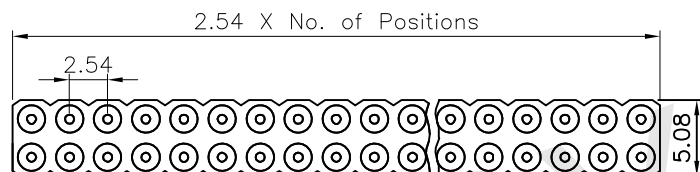

产品规范 PRODUCT SPECIFICATION

- 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
- 端子电镀 FINISH : GOLD OR TIN PLATED .
- 额定电流 CURRENT RATING : 3 AMPERE .
- 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN .
- 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE .
- 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max . ;
测试后 Final : 40 m Ohm Max . .
- 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C .

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
		CHEK	08Jan2016		
		APVD	Abel	NAME Machine Pin Header 2.54mm H:11.96mm DIP Type	
		PRODUCT SPEC	08Jan2016	SIZE	DRAWING No.
		WEIGHT	—	A4	YL014-XXX
THIRD ANGLE PROJECTION		CUSTOMER DRAWING		SCALE	SHEET
				1 : 1	1 OF 1