
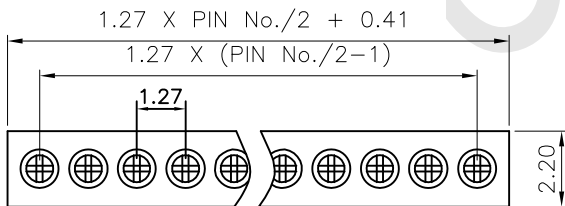


YL014-XXX-XXX

Machine Pin

002:Single Row  
001:Dual Row

Single Row    Dual Row  
002:02Pin    004:04Pin  
003:03Pin    006:06Pin  
\*\*\*\*\*        \*\*\*\*\*  
040:50Pin    100:100Pin

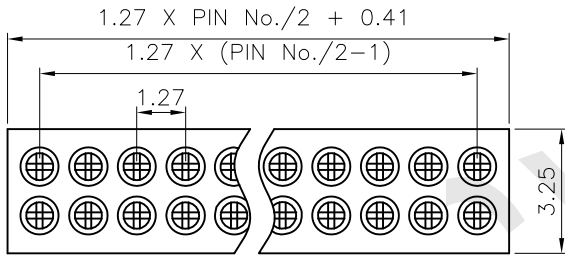

产品规范 PRODUCT SPECIFICATION

1. 绝缘材质 INSULATOR MATERIAL : POLYESTER, UL94V-0 .
2. 端子材质 TERMINAL MATERIAL : COPPER ALLOY .
3. 端子电镀 FINISH : GOLD OR TIN PLATED.
4. 额定电流 CURRENT RATING : 1 AMPERE.
5. 绝缘阻抗 INSULATION RESISTANCE : 1000M OHMS MIN.
6. 耐电压 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. 接触阻抗 CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;  
测试后 Final : 40 m Ohm Max. .
8. 操作温度范围 OPERATING TEMPERATURE : - 40°C to +105°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD			
<p>THIRD ANGLE PROJECTION</p>		CHEK	08Jan2016			NAME	
		APVD	Abel	08Jan2016	Machine Female Header 1.27mm DIP Type		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:			PRODUCT SPEC	SIZE	DRAWING No.
		0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°			WEIGHT	A4	YL014-XXX
			CUSTOMER DRAWING	SCALE	1 : 1		
				SHEET	1 OF 1		