

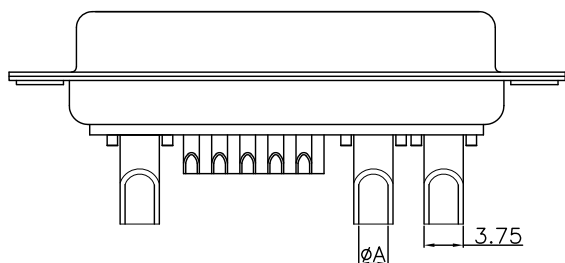




## REVISIONS

LTR	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	01Jan16	AW	WK

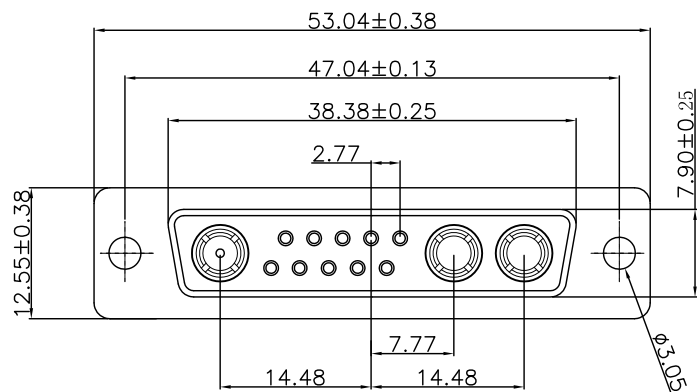

## NOTE:

- MATERIALS AND FINISHED  
INSULATOR : PBT+30% GF UL 94V-0,  
SHELL : STEEL, NI OR SN FINISHED  
CONTACT MATERIAL : BRASS, SELEVITE GOLD FINISHED
- ELECTRICAL CHARACTERISTICS  
CURRENT RATING : 1.0 AMP DC  
VOLTAGE RATING: 300 V DC  
CONTACT RESISTANCE : 20 MILLIOHMS MAX.  
DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC MIN.  
INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
- ENVIRONMENTAL  
OPERATING TEMPERATURE: -55°C ~ +85°C  
STORAGE TEMPERATURE: -55°C ~ +105°C

PART NO.	Current Rating	Dimension
		Ø A
YL013-008-003	40 AMPS	Ø 3.75
YL013-008-002	20 AMPS	Ø 2.8
YL013-008-001	10 AMPS	Ø 1.7

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. WU	01Jan2016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
DIMENSIONS: mm		CHEK S. CHIEN	01Jan2016		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Abel	01Jan2016	NAME 13W3母头焊线式全金黑胶, 铆合光孔	
 THIRD ANGLE PROJECTION		PRODUCT SPEC —	—	SIZE A4	DRAWING No. Y=YL013-008
0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		WEIGHT —	—	CUSTOMER DRAWING	
		SCALE 1 : 1		SHEET 1 of 1	